

HOW TO INSTALL THE HALF FORM STAND

COMPONENTS IN THE PACKAGE



INSTALLATION

Step 1

Cut and open the end of the plastic wrap on the main pole and remove the plastic cover from bottom tip.



Step 2

Install the main pole onto the base stand.

- Release two locking knobs from the base stand.
- Insert the bottom tip of the pole into the hole of the base stand.




Step 3

Install the half form into the stand pole.



Step 4

Hold the bottom part of aluminum pole and turn the half form until the half form is locked firmly into the stand.

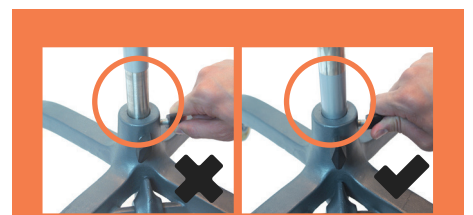


CAUTION

Remember to fully insert the pole below the grey painted area.

- Tighten two locking knobs.
- Dispose the plastic wrap on the main pole.

APPLICATIONS

Press down on front brake to lock the wheel in place.

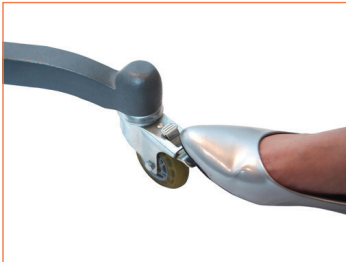

CAUTION

Do not step on the pedal before installing the mannequin in order to prevent the user from being injured by the sudden rise of the pole.

Hold the mannequin with both hands while lifting up / lowering down the mannequin by stepping on the pedal.



CAUTION

Do not rotate the form without releasing the wheel locks or stepping on the pedal. The pole will break and lose the locking function if the form is rotated without unlocking the pole.



METHOD 1

Release the two wheel locks and rotate the form by moving the base stand.



METHOD 2

Step on the pedal to unlock the pole while rotating the form.

